

# MONACO COMPONENTS, INC.

BUILT-IN DRIVE STYLE      FLANGE MOUNTING



**3000  
series**

- Variety of voltage ranges available.
- Rich sound output.
- Low current drain.

| MODEL                 | MPF-3412            | MPF-3414            | MPF-3415             | MPF-3417   |
|-----------------------|---------------------|---------------------|----------------------|------------|
| FREQUENCY *           | 2800 HZ ± 500 Hz    |                     | 2900 HZ ± 500 Hz     |            |
| DRIVING CIRCUIT       | BUILT IN            |                     |                      |            |
| OPERATING VOLTAGE     | 3 - 36 V            | 1.5 - 20 V          | 3 - 28 V             |            |
| RATED VOLTAGE         | 12 V                |                     |                      |            |
| SOUND PRESSURE *      | 90 dBA MIN. @ 30 cm | 96 dBA MIN. @ 30 cm | 100 dBA MIN. @ 30 cm |            |
| CURRENT CONSUMPTION * | 8 mA MAX.           | 10 mA MAX.          | 9 mA MAX.            |            |
| tone                  | CONTINUOUS          |                     | SLOW PULSE           | FAST PULSE |
| CONNECTION STYLE      | FLANGE / LEADS      |                     |                      |            |
| OPERATING TEMPERATURE | -20° to +60° C      |                     |                      |            |

\* VALUES AT RATED VOLTAGE

MPF-3412  
MPF-3414  
MPF-3415  
MPF-3417

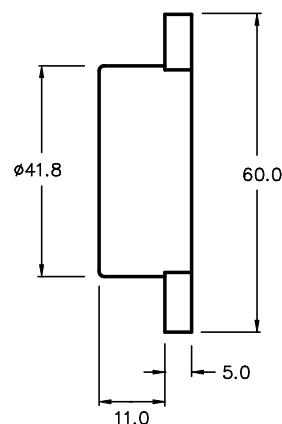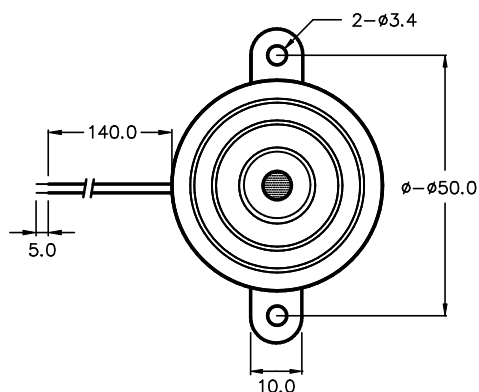

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

**SALES OFFICE (516)-767-6644**

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: [info@monacocomponents.com](mailto:info@monacocomponents.com)

[www.monacocomponents.com](http://www.monacocomponents.com)