

MONACO COMPONENTS, INC.


BUILT-IN DRIVE STYLE PANEL MOUNTING

**1000
series**

- Snap locks into panels 0.8 mm to 3.2 mm thick with compression washer.
- High sound output.
- Supplied with plate terminals.

MODEL	MPF-1444
FREQUENCY *	2900 HZ ± 500 Hz
DRIVING CIRCUIT	BUILT IN
OPERATING VOLTAGE	1 - 28 V
RATED VOLTAGE	24 V
SOUND PRESSURE *	85 dBA MIN. @ 30 cm
CURRENT CONSUMPTION *	15 mA MAX.
tone	CONTINUOUS
CONNECTION STYLE	PANEL MOUNT WITH PLATE TERMINALS
OPERATING TEMPERATURE	-20° to +60° C

* VALUES AT OPERATING VOLTAGE

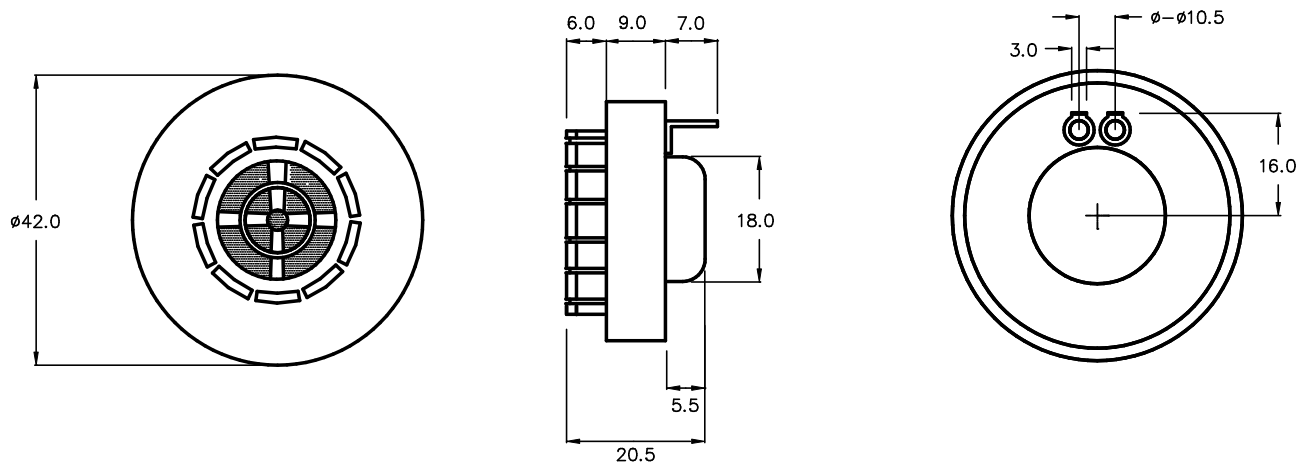

TYPICAL PANEL INSTALLATION:

Hole in panel should be 27.0 ±0.1 mm in diameter and should be punched from the back side of the panel so that the locking fingers enter on the slightly rounded edge of the hole. Assemble the proper compression washer and press into the panel hole until the locking fingers snap over the hole edge. Installation pressure should be applied only at the circumference of the device. This model will snap lock into panels 0.8 mm to 3.2 mm thick using the appropriate compression washer.

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: info@monacocomponents.com

www.monacocomponents.com