

# MONACO COMPONENTS, INC.

EXTERNAL DRIVE STYLE      PCB MOUNTING



**4000  
series**

- Rich sound output.
- High efficiency.
- Low power consumption.

MODEL	MPF-4308	MPF-4404
RESONANT FREQUENCY	1300 Hz	1000 Hz
OPERATING VOLTAGE	40 V <sub>p-p</sub> MAX.	30 V <sub>p-p</sub> MAX.
RATED VOLTAGE	9 V <sub>p-p</sub> SQUAREWAVE	3 V <sub>rms</sub> SINEWAVE
CAPACITANCE	48000 ± 30% pF @ 120 Hz	80000 ± 30% pF @ 1000 Hz
DRIVE CIRCUIT	EXTERNAL	EXTERNAL
SOUND PRESSURE *	85 dBA MIN. @ 10 cm @ 1300 Hz	70 dBA MIN. @ 10 cm @ 1000 Hz
CURRENT CONSUMPTION *	3 mA MAX.	1.5 mA MAX.
tone	DEPENDENT ON DRIVE CIRCUIT USED	DEPENDENT ON DRIVE CIRCUIT USED
CONNECTION STYLE	PCB MOUNT (PINS)	PCB MOUNT (PINS)
OPERATING TEMPERATURE	-20° to +105° C	-20° to +70° C

\* VALUES AT RATED VOLTAGE



**MPF-4308**

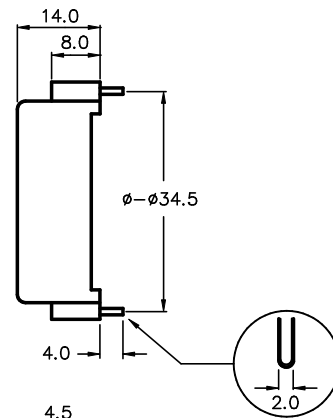

**MPF-4404**

COLOR : GREY

STAINLESS STEEL SUBSTRATE



ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

**SALES OFFICE (516)-767-6644**

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: [info@monacocomponents.com](mailto:info@monacocomponents.com)

[www.monacocomponents.com](http://www.monacocomponents.com)