

MONACO COMPONENTS, INC.


EXTERNAL DRIVE STYLE FLANGE WITH LEADWIRERS

**5000
series**

- Small size and lightweight.
- Rich sound output.
- Low current drain.

MODEL	MPB-5100	MPF-5104	MPF-5108
RESONANT FREQUENCY	4800 Hz	4000 Hz	
OPERATING VOLTAGE	30 V _{p-p} MAX.	25 V _{p-p} MAX.	
RATED VOLTAGE	10 V _{p-p} SQUAREWAVE	9 V _{p-p} SQUAREWAVE	
CAPACITANCE *	15000 ± 30% pF	9500 ± 30% pF @ 120 Hz	
DRIVE CIRCUIT	EXTERNAL		
SOUND PRESSURE *	85 dB MIN. @ 10 cm	80 dBA MIN. @ 10 cm	
CURRENT CONSUMPTION *	8 mA MAX.	1.5 mA MAX.	2.0 mA MAX.
tone	DEPENDENT ON DRIVE CIRCUIT USED		
CONNECTION STYLE	WIRE LEADS		
OPERATING TEMPERATURE	-20° to +60° C		

* VALUES AT RATED VOLTAGE

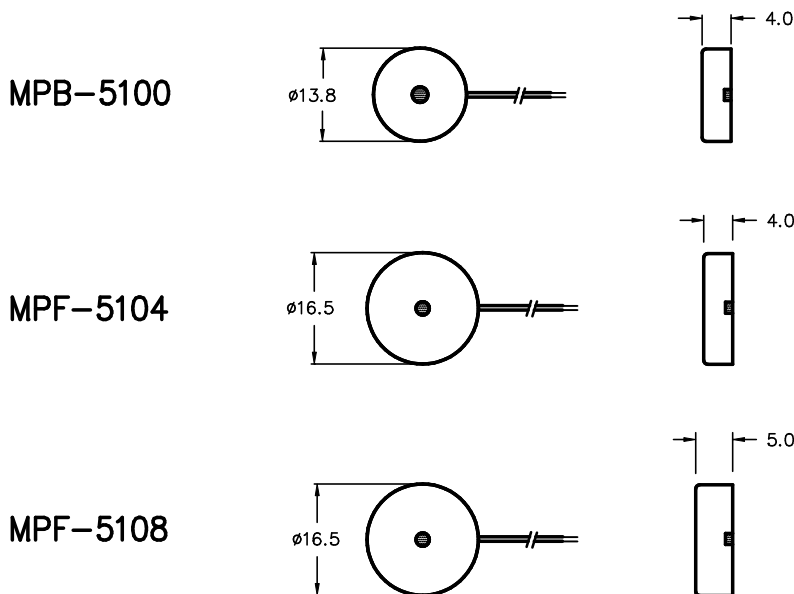

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644
 CORPORATE OFFICE
 P.O. Box 575, Scotch Plains, NJ. 07076
 Phone: (908)-322-2977 Fax: (908)-322-2358
 E-mail: info@monacocomponents.com
www.monacocomponents.com