

# MONACO COMPONENTS, INC.

EXTERNAL DRIVE STYLE      ELECTRO-MAGNETIC

**7000  
series**


- Sealed and washable.
- Wide temperature and voltage ranges.
- Compact design.

MODEL	MMF-7134	MMF-7136	MMF-7138
RATED VOLTAGE	1.5 V	6 V	12 V
OPERATING VOLTAGE	1 - 3 V	3 - 12 V	6 - 18 V
RATED CURRENT *	12 mA MAX.	40 mA MAX.	
COIL RESISTANCE	27 ± 3 OHMS	50 ± 5 OHMS	115 ± 12 OHMS
DRIVE CIRCUIT	EXTERNAL		
COIL IMPEDANCE **	80 OHMS	110 OHMS	200 OHMS
SOUND PRESSURE *	80 dBA MIN. @ 10 cm	85 dBA MIN. @ 10 cm	
REPRODUCED FREQUENCY	2048 Hz	1850 - 2500 Hz (MIN. 80 dB)	
tone	DEPENDENT ON DRIVE CIRCUIT USED		
CONNECTION STYLE	PCB MOUNT (PINS)		
OPERATING TEMPERATURE	-25° to +70° C		

\* VALUE AT RATED VOLTAGE (2048 Hz, 1/2 DUTY SQUAREWAVE)

\*\* 2048 Hz, SINEWAVE, CURRENT 60 MICRO-AMPS

MMF-7134  
MMF-7136  
MMF-7138

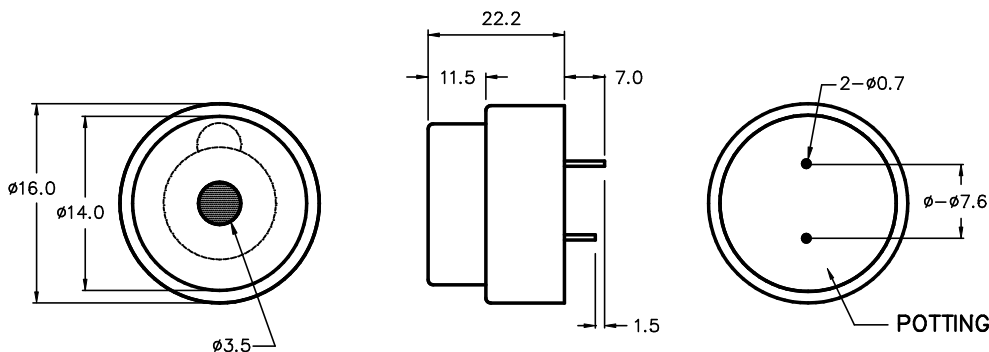

NORYL SEI-GFN2 HOUSING MATERIAL  
SEALED AND WASHABLE

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

**SALES OFFICE (516)-767-6644**

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: [info@monacocomponents.com](mailto:info@monacocomponents.com)

[www.monacocomponents.com](http://www.monacocomponents.com)