

MONACO COMPONENTS, INC.

EXTERNAL DRIVE STYLE ELECTRO-MAGNETIC

**7000
series**

- Ultra-miniature design.
- Rich sound output.


MODEL	MMF-7152	MMF-7154
RATED VOLTAGE	6 V	12 V
OPERATING VOLTAGE	3 - 12 V	6 - 18 V
RATED CURRENT *	40 mA MAX.	
COIL RESISTANCE	45 ± 7 OHMS	115 ± 17 OHMS
DRIVE CIRCUIT	EXTERNAL	
COIL IMPEDANCE **	110 OHMS	200 OHMS
SOUND PRESSURE *	85 dBA MIN. @ 10 cm	
REPRODUCED FREQUENCY	2000 - 3000 Hz (80 dB MIN.)	
TONE	DEPENDENT ON DRIVE CIRCUIT USED	
CONNECTION STYLE	PCB MOUNT (PINS)	
OPERATING TEMPERATURE	-40° to +85° C	

* VALUE @ RATED VOLTAGE (2048 Hz, 1/2 DUTY SQUAREWAVE)

** 2048 Hz, SINEWAVE; 60 MICRO-AMPS

**MMF-7152
MMF-7154**

NORYL SEI-GFN2 HOUSING MATERIAL
SEALED AND WASHABLE

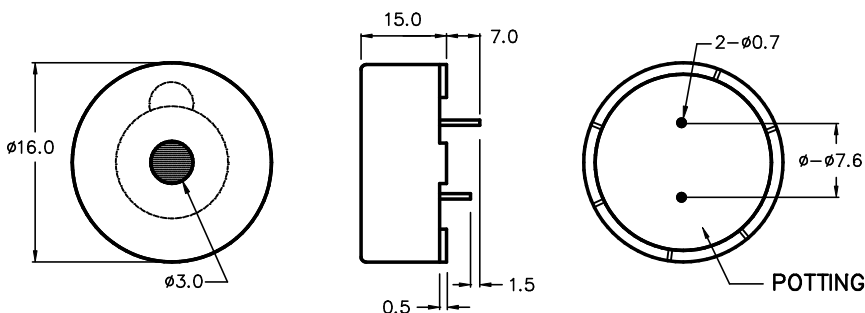

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: info@monacocomponents.com

www.monacocomponents.com