

MONACO COMPONENTS, INC.

EXTERNAL DRIVE STYLE ELECTRO-MAGNETIC

**7000
series**


- Compact design.
- Sealed and washable.
- Rich sound output.

MODEL	MMF-7156	MMF-7158	MMF-7160
RATED VOLTAGE	1.5 V	6 V	12 V
OPERATING VOLTAGE	1 - 2 V	3 - 10 V	6 - 15 V
RATED CURRENT *	40 mA MAX.		
COIL RESISTANCE	14 ± 9 OHMS	60 ± 9 OHMS	120 ± 18 OHMS
DRIVE CIRCUIT	EXTERNAL		
COIL IMPEDANCE **	22 OHMS	90 OHMS	170 OHMS
SOUND PRESSURE *	80 dBA MIN. @ 10 cm	85 dBA MIN. @ 10 cm	
REPRODUCED FREQUENCY	2000 - 2500 Hz (80 dB MIN.)		
TONE	DEPENDENT ON DRIVE CIRCUIT USED		
CONNECTION STYLE	PCB MOUNT (PINS)		
OPERATING TEMPERATURE	-20° to +70° C	-30° to +85° C	

* VALUE AT RATED VOLTAGE (2048 Hz, 1/2 DUTY SQUAREWAVE)

** RESONANT FREQUENCY, SINEWAVE, CURRENT 60 MICRO-AMPS

MMF-7156
MMF-7158
MMF-7160

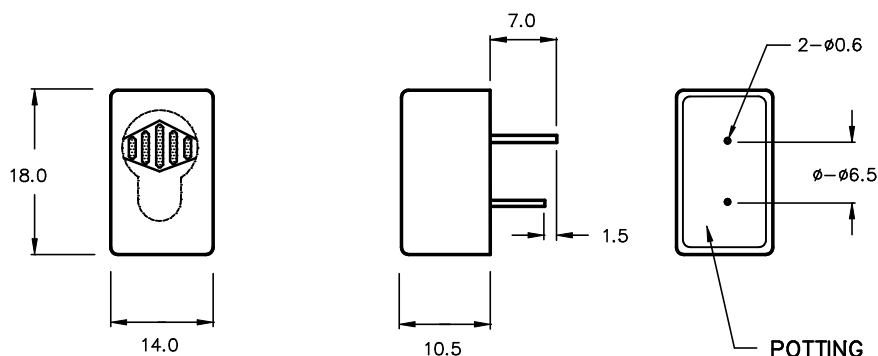

NORYL SEI-GFN2 HOUSING MATERIAL
SEALED AND WASHABLE

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: info@monacocomponents.com

www.monacocomponents.com