

# MONACO COMPONENTS, INC.

## BUILT-IN DRIVE STYLE ELECTRO-MAGNETIC


**8000  
series**

- Sealed design for soldering and washing.
- Compact, low profile housing.
- Wide range of operating voltages.

MODEL	MMF-8116	MMF-8118	MMF-8120
FREQUENCY *	2300 Hz $\pm$ 500 Hz	2300 Hz $\pm$ 400 Hz	
DRIVING CIRCUIT	BUILT IN		
OPERATING VOLTAGE	1.4 - 2 V	3 - 7 V	9 - 15 V
RATED VOLTAGE	1.5 V	5 V	12 V
SOUND PRESSURE *	75 dBA MIN. @ 10 cm	83 dBA MIN. @ 10 cm	
CURRENT CONSUMPTION *	25 mA	30 mA	
TONE	CONTINUOUS		
CONNECTION STYLE	PCB MOUNT (PINS)		
OPERATING TEMPERATURE	-20° to +60° C	-20° to +70° C	

\* VALUES AT RATED VOLTAGE

MMF-8116  
MMF-8118  
MMF-8120

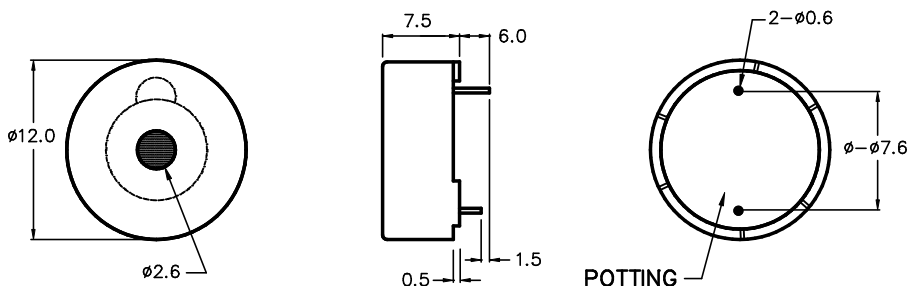

NORYL SEI-GFN2 HOUSING MATERIAL  
SEALED - SOLDERABLE AND WASHABLE

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

**SALES OFFICE (516)-767-6644**

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: [info@monacocomponents.com](mailto:info@monacocomponents.com)

[www.monacocomponents.com](http://www.monacocomponents.com)